
ELEVATION


## NOTES

1. BEAMS SHALL BE MAINTAINED IN AN UPRIGHT POSITION AT ALL TIMES AND SHALL BE PICKED UP WITHIN 7'-9" FROM THEIR ENDS. DISREGARDING THIS REQUIREMENT COULD LEAD TO COLLAPSE OF THE BEAM. PICK-UPS SHALL BE EMBEDDED TO WITHIN 4" OF THE BOTTOM OF THE BEAM. DETAILS OF PICK-UPS SHALL BE INCLUDED IN THE SHOP DRAWINGS.
2. CHAMFER EDGES OF BEAMS  $\frac{1}{2}$ ",  $\frac{3}{4}$ " OR 1".
3. HORIZONTAL DIMENSIONS ARE IN PLACE DIMENSIONS. THE BEAM LENGTH INCLUDES THE  $\frac{1}{8}$ " EPOXY MORTAR AT EACH END. SHOP DRAWINGS SHALL ADJUST HORIZONTAL DIMENSIONS FOR GRADE AND FABRICATION EFFECTS SUCH AS SHRINKAGE AND ELASTIC SHORTENING.
4. AT  $\phi$  BEARING, FORM A  $1\frac{3}{4}$ " DIAMETER X 7" DEEP HOLE AT THE FIXED ENDS AND A 6" X  $1\frac{3}{4}$ " X 7" DEEP SLOT AT THE EXPANSION ENDS FOR A  $1\frac{1}{2}$ " DIAMETER SMOOTH DOWEL. SEE PLAN AND ELEVATION SHEET FOR LOCATION OF FIXED AND EXPANSION ENDS.
5. TOPS OF BEAMS SHALL BE ROUGH FLOATED AT APPROXIMATELY THE TIME OF INITIAL SET. ENTIRE TOP SHALL BE SCRUBBED TRANSVERSELY WITH A COARSE BRUSH TO REMOVE ALL LAITANCE AND TO PRODUCE A ROUGHENED SURFACE FOR BONDING TO THE SLAB. ROUGHENED SURFACE SHALL HAVE AN AMPLITUDE OF APPROXIMATELY  $\frac{1}{4}$ ". CONCRETE FINS OR PROJECTIONS SHALL BE REMOVED TO PRODUCE A VERTICAL FACE AT THE EDGE OF THE BEAM.
6. ALL HOLES FORMED INTO THE BEAMS TO FACILITATE TRANSPORT SHALL BE FILLED AND GIVEN A TYPE I FINISH, PRIOR TO ACCEPTANCE OF THE BEAM. REMOVE PVC OR SIMILAR FORMING MATERIALS FROM EACH HOLE, EXPOSING THE CONCRETE SURFACE. COAT INTERIOR OF HOLE WITH A TYPE II EPOXY RESIN ADHESIVE IN ACCORDANCE WITH GEORGIA STANDARD SPECIFICATION 886 AND FILL WITH A RAPID SETTING PATCHING MATERIAL IN ACCORDANCE WITH GEORGIA STANDARD SPECIFICATION 934.
7. NON-COMPOSITE DEAD LOAD DEFLECTION ( $\Delta_{NC}$ ) AT THE MIDPOINT IS DUE TO THE WEIGHT OF THE SLAB AND COPING.
8. COMPOSITE DEAD LOAD DEFLECTION ( $\Delta_C$ ) AT THE MIDPOINT IS DUE TO THE WEIGHT OF BARRIER.
9. STRANDS SHALL MEET ALL REQUIREMENTS OF ASTM A 416 GRADE 270.
10. PRESTRESSING DATA IS AS FOLLOWS:
  - A. USE XX - 0.6" DIAMETER LOW-RELAXATION ( $A = 0.217$  SQ IN) STRANDS. PRETENSION TOP FOUR (4) STRANDS TO 10,000 LBS EACH. PRETENSION BOTTOM STRANDS TO 43,943 LBS EACH.
  - B. PRETENSIONED STRANDS SHALL BE RELEASED AFTER THE CONCRETE HAS REACHED A MINIMUM STRENGTH ( $f_{ci}$ ) OF X,XXX PSI.
  - C. INCLUDING THE TOP STRANDS, THE TOTAL JACKING FORCE OF PRETENSIONING IS X,XXX,XXX LBS.
  - D. INCLUDING THE TOP STRANDS, THE NET PRESTRESSING FORCE OF THE STRANDS AFTER ALL LOSSES IS XXX,XXX LBS.
11. CONCRETE STRENGTH ( $f'_c$ ) = X,XXX PSI.
12. ALLOWABLE PSC BEAM TENSION = XXX PSI.

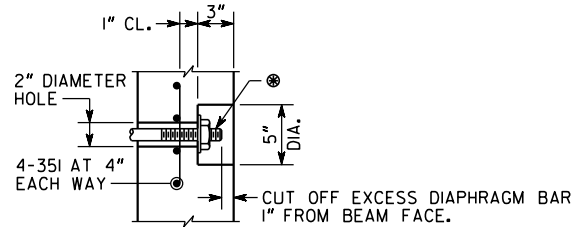


② DIAPHRAGM BAR SHALL BE A 1" DIAMETER PLAIN BAR, THREADED 5" ON EACH END, WITH 1/4" X 3 1/2" DIAMETER WASHERS AND HEX NUTS (ASTM A 709 GRADE 36).  
TIGHTEN DIAPHRAGM BAR AS PER SUB-SECTION 507.3.05.C OF THE GEORGIA DOT SPECIFICATIONS.  
AFTER EXCESS DIAPHRAGM BAR HAS BEEN CUT OFF, PAINT DIAPHRAGM BAR, WASHER, AND NUT EXPOSED IN RECESS WITH SPECIAL PROTECTIVE COATING NO. 2 P AS PER SECTION 535 OF THE GEORGIA DOT SPECIFICATIONS. AFTER PAINTING, FILL THE RECESS WITH AN APPROVED EPOXY GROUT.  
GALVANIZING OF THE DIAPHRAGM BAR AS PER SUB-SECTION 865.2.01.B.2 OF THE GEORGIA DOT SPECIFICATIONS IS NOT REQUIRED.

### RECESS DETAIL FOR DIAPHRAGM BAR ENDS

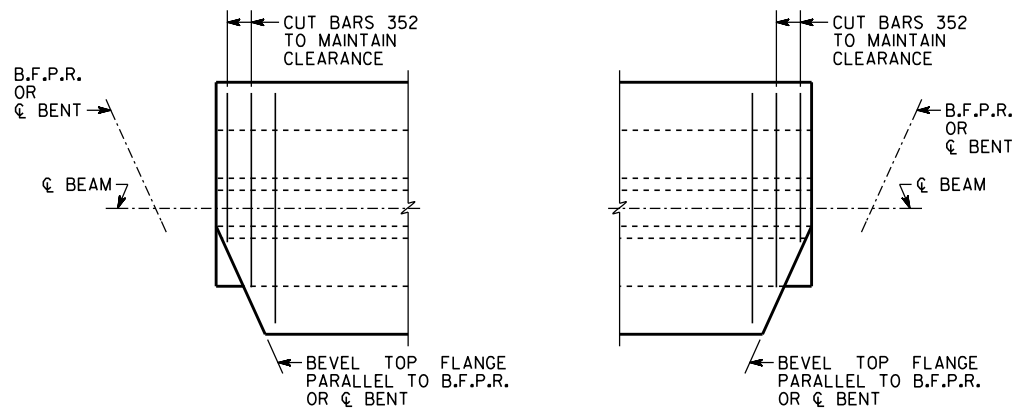

## BEVEL DETAILS


## BEVEL DETAILS

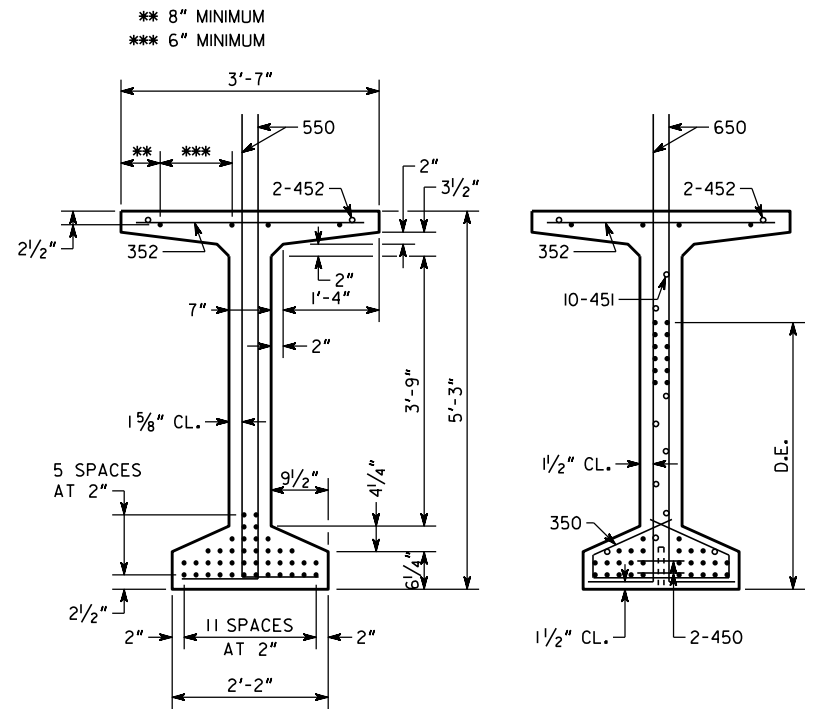

## SECTION AT MIDPOINT

## SECTION AT END

## REINFORCEMENT

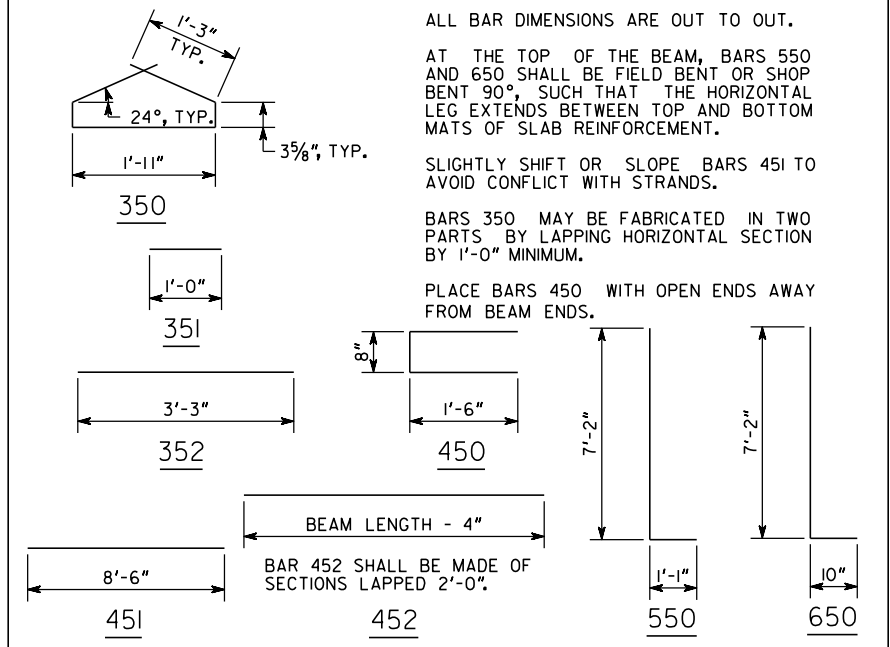

ALL BAR DIMENSIONS ARE OUT TO OUT.

AT THE TOP OF THE BEAM, BARS 550 AND 650 SHALL BE FIELD BENT OR SHOP BENT 90°, SUCH THAT THE HORIZONTAL LEG EXTENDS BETWEEN TOP AND BOTTOM MATS OF SLAB REINFORCEMENT.

SLIGHTLY SHIFT OR SLOPE BARS 45° TO  
AVOID CONFLICT WITH STRANDS.

BARS 350 MAY BE FABRICATED IN TWO PARTS BY LAPPING HORIZONTAL SECTION BY 1'-0" MINIMUM.

PLACE BARS 450 WITH OPEN ENDS AWAY FROM BEAM ENDS.

BRIDGE NO. 1

## GEORGIA

**DEPARTMENT OF TRANSPORTATION**  
ENGINEERING DIVISION-OFFICE OF BRIDGES AND STRUCTURES

MOD BULB TEE, 63 IN PSC BEAM - END SPANS

X

X

NO SCALE X

DESIGNED <u>X</u>	CHECKED <u>X</u>	REVIEWED <u>DLC/SKG</u>
DRAWN <u>X</u>	DESIGN GROUP <u>X</u>	APPROVED <u>DPD</u>

DRAWING NO.


BRIDGE SHEET  
X OF X

DESIGNED	X
DRAWN	X

CHECKED	X
DESIGN GROUP	X


REVIEWED DLC/SKG  
APPROVED DPD

01088432  
bulb63mod.dgn  
17/2022  
TEMPLATE LAST REVISED JANUARY 7, 2022

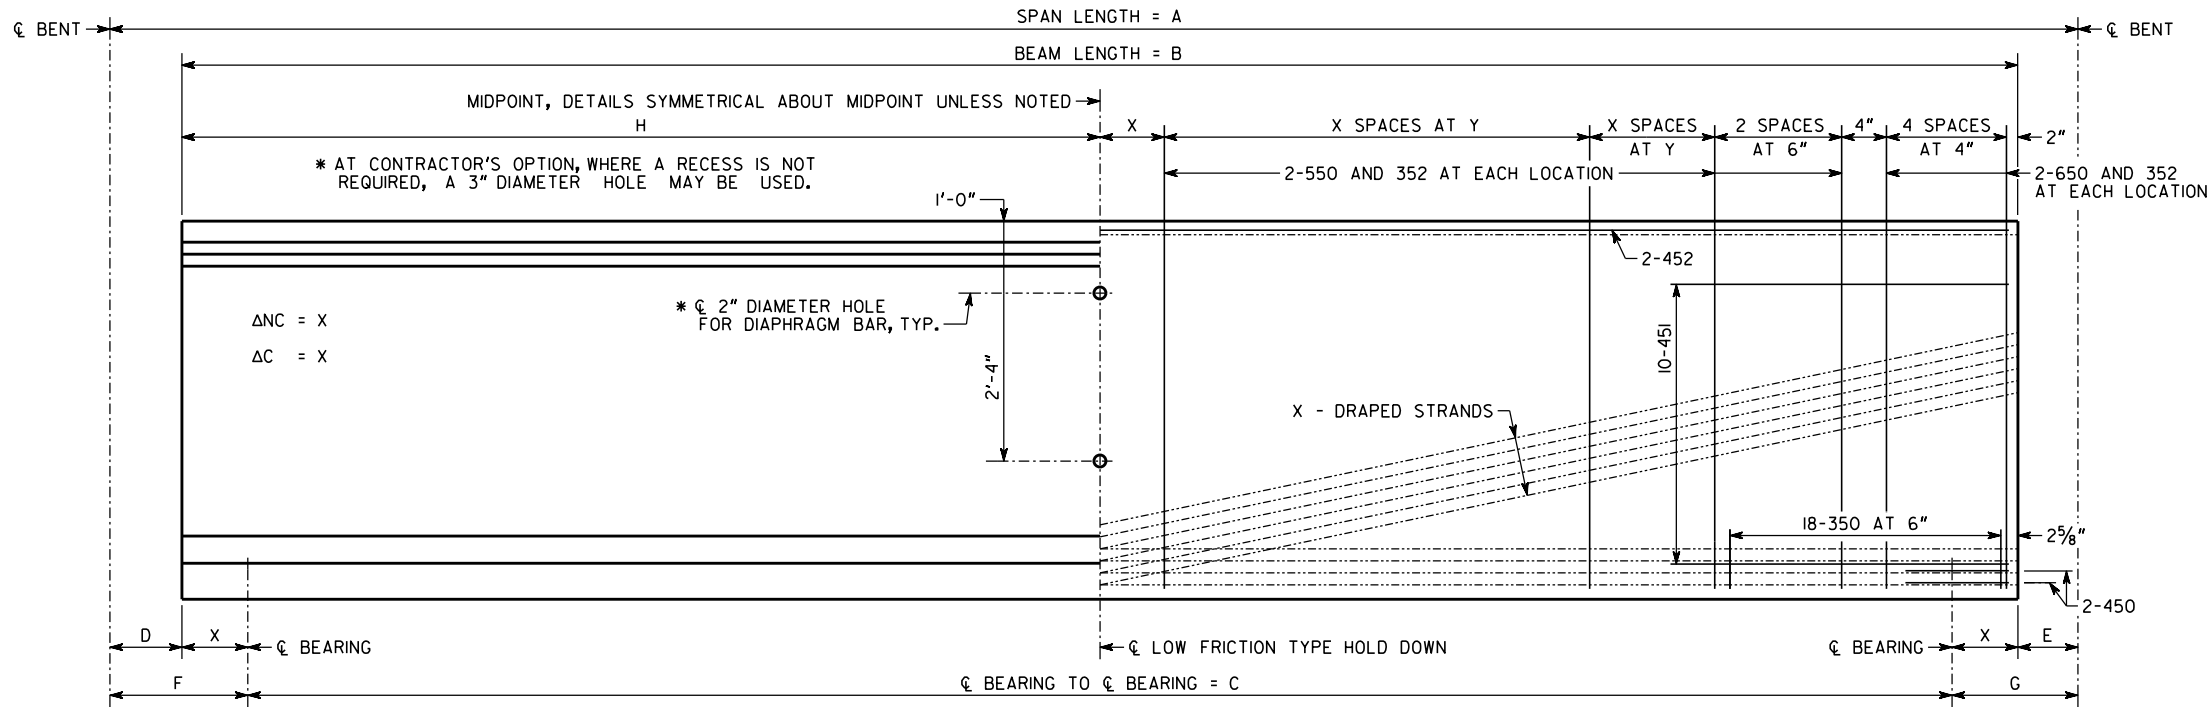


### ELEVATION

- BEAMS SHALL BE MAINTAINED IN AN UPRIGHT POSITION AT ALL TIMES AND SHALL BE PICKED UP WITHIN 7'-9" FROM THEIR ENDS. DISREGARDING THIS REQUIREMENT COULD LEAD TO COLLAPSE OF THE BEAM. PICK-UPS SHALL BE EMBEDDED TO WITHIN 4" OF THE BOTTOM OF THE BEAM. DETAILS OF PICK-UPS SHALL BE INCLUDED IN THE SHOP DRAWINGS.
- CHAMFER EDGES OF BEAMS  $\frac{1}{2}$ ",  $\frac{3}{4}$ " OR 1".
- HORIZONTAL DIMENSIONS ARE IN PLACE DIMENSIONS. THE BEAM LENGTH INCLUDES THE  $\frac{1}{8}$ " EPOXY MORTAR AT EACH END. SHOP DRAWINGS SHALL ADJUST HORIZONTAL DIMENSIONS FOR GRADE AND FABRICATION EFFECTS SUCH AS SHRINKAGE AND ELASTIC SHORTENING.
- AT Ø BEARING, FORM A  $1\frac{3}{4}$ " DIAMETER X 7" DEEP HOLE AT THE FIXED ENDS AND A 6" X  $1\frac{3}{4}$ " X 7" DEEP SLOT AT THE EXPANSION ENDS FOR A  $1\frac{1}{2}$ " DIAMETER SMOOTH DOWEL. SEE PLAN AND ELEVATION SHEET FOR LOCATION OF FIXED AND EXPANSION ENDS.
- TOPS OF BEAMS SHALL BE ROUGH FLOATED AT APPROXIMATELY THE TIME OF INITIAL SET. ENTIRE TOP SHALL BE SCRUBBED TRANSVERSELY WITH A COARSE BRUSH TO REMOVE ALL LAITANCE AND TO PRODUCE A ROUGHENED SURFACE FOR BONDING TO THE SLAB. ROUGHENED SURFACE SHALL HAVE AN AMPLITUDE OF APPROXIMATELY  $\frac{1}{4}$ " CONCRETE FINS OR PROJECTIONS SHALL BE REMOVED TO PRODUCE A VERTICAL FACE AT THE EDGE OF THE BEAM.
- ALL HOLES FORMED INTO THE BEAMS TO FACILITATE TRANSPORT SHALL BE FILLED AND GIVEN A TYPE I FINISH, PRIOR TO ACCEPTANCE OF THE BEAM. REMOVE PVC OR SIMILAR FORMING MATERIALS FROM EACH HOLE, EXPOSING THE CONCRETE SURFACE. COAT INTERIOR OF HOLE WITH A TYPE II EPOXY RESIN ADHESIVE IN ACCORDANCE WITH GEORGIA STANDARD SPECIFICATION 886 AND FILL WITH A RAPID SETTING PATCHING MATERIAL IN ACCORDANCE WITH GEORGIA STANDARD SPECIFICATION 934.
- NON-COMPOSITE DEAD LOAD DEFLECTION ( $\Delta_{NC}$ ) AT THE MIDPOINT IS DUE TO THE WEIGHT OF THE SLAB AND COPING.
- COMPOSITE DEAD LOAD DEFLECTION ( $\Delta_C$ ) AT THE MIDPOINT IS DUE TO THE WEIGHT OF BARRIER.
- STRANDS SHALL MEET ALL REQUIREMENTS OF ASTM A 416 GRADE 270.
- PRESTRESSING DATA IS AS FOLLOWS:
  - USE XX - 0.6" DIAMETER LOW-RELAXATION ( $A = 0.217$  SQ IN) STRANDS. PRETENSION TOP FOUR (4) STRANDS TO 10,000 LBS EACH. PRETENSION BOTTOM STRANDS TO 43,943 LBS EACH.
  - PRETENSIONED STRANDS SHALL BE RELEASED AFTER THE CONCRETE HAS REACHED A MINIMUM STRENGTH ( $f'_c$ ) OF X,XXX PSI.
  - INCLUDING THE TOP STRANDS, THE TOTAL JACKING FORCE OF PRETENSIONING IS X,XXX,XXX LBS.
  - INCLUDING THE TOP STRANDS, THE NET PRESTRESSING FORCE OF THE STRANDS AFTER ALL LOSSES IS XXX,XXX LBS.
- CONCRETE STRENGTH ( $f'_c$ ) = X,XXX PSI.
- ALLOWABLE PSC BEAM TENSION = XXX PSI.

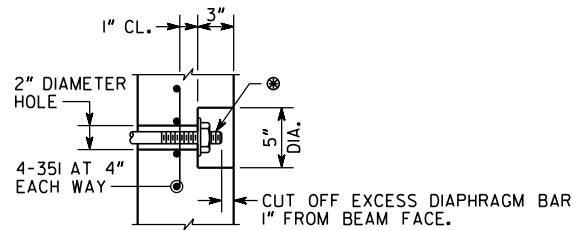


⊙ DIAPHRAGM BAR SHALL BE A 1" DIAMETER PLAIN BAR, THREADED 5" ON EACH END, WITH  $\frac{1}{4}$ " X  $3\frac{1}{2}$ " DIAMETER WASHERS AND HEX NUTS (ASTM A 709 GRADE 36).  
TIGHTEN DIAPHRAGM BAR AS PER SUB-SECTION 507.3.05.C OF THE GEORGIA DOT SPECIFICATIONS.  
AFTER EXCESS DIAPHRAGM BAR HAS BEEN CUT OFF, PAINT DIAPHRAGM BAR, WASHER, AND NUT EXPOSED IN RECESS WITH SPECIAL PROTECTIVE COATING NO. 2 P AS PER SECTION 535 OF THE GEORGIA DOT SPECIFICATIONS. AFTER PAINTING, FILL THE RECESS WITH AN APPROVED EPOXY GROUT.  
GALVANIZING OF THE DIAPHRAGM BAR AS PER SUB-SECTION 865.2.01.B.12 OF THE GEORGIA DOT SPECIFICATIONS IS NOT REQUIRED.

### RECESS DETAIL FOR DIAPHRAGM BAR ENDS


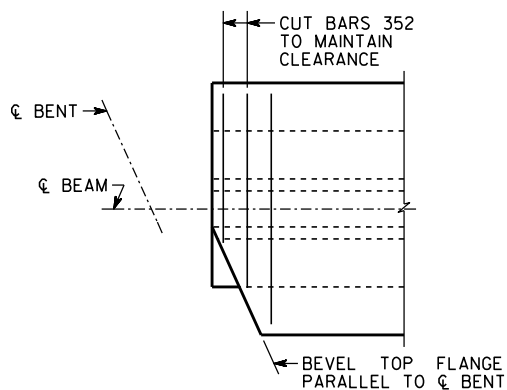


### BEVEL DETAILS

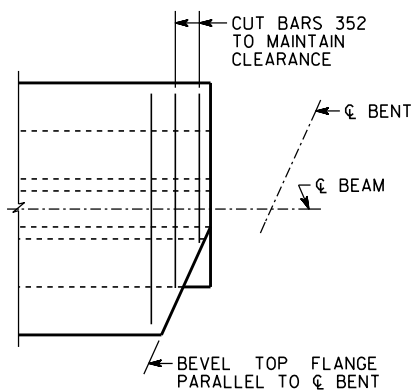

### BEVEL DETAILS

1 INCH WHEN PRINTED FULL SIZE

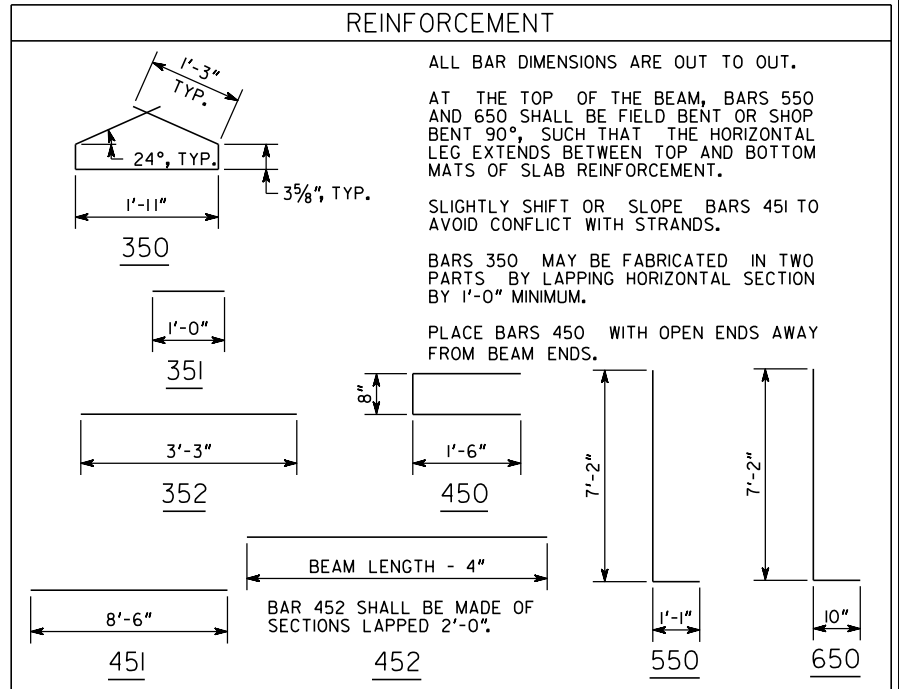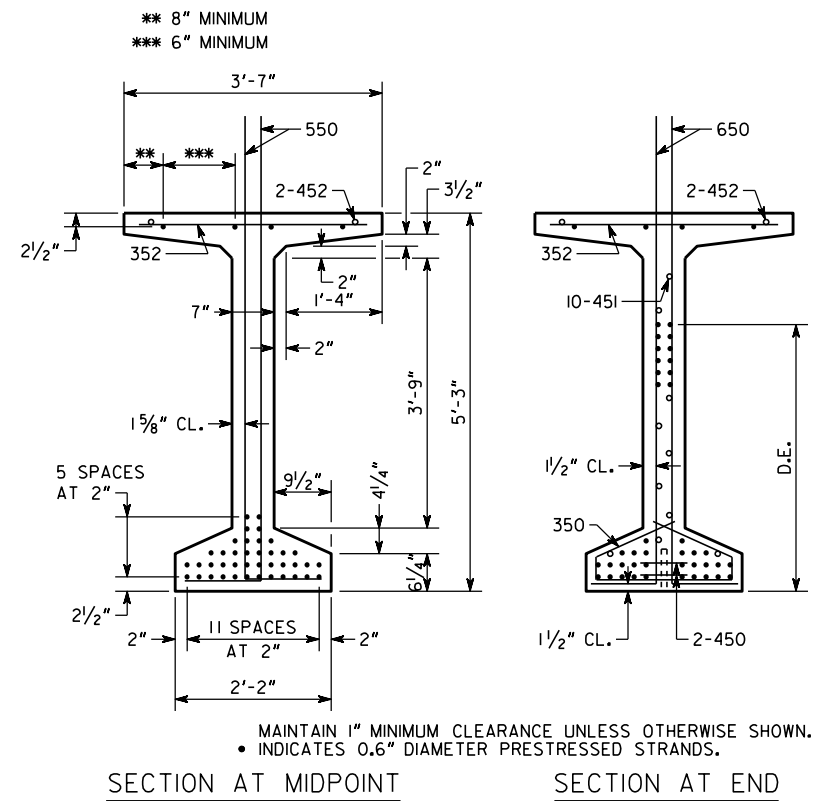

BRIDGE NO. 1		GEORGIA	
DEPARTMENT OF TRANSPORTATION		ENGINEERING DIVISION-OFFICE OF BRIDGES AND STRUCTURES	
MOD BULB TEE, 63 IN PSC BEAM - INTERMEDIATE SPANS		X	
X		X	
NO SCALE		X	
DRAWING NO. 35-XXXX		DESIGNED X	
BRIDGE SHEET X OF X		DRAWN X	
		CHECKED X	
		DESIGN GROUP X	
		REVIEWED DLC/SKG	
		APPROVED DPD	