



Interoffice Memo Office of Design Policy & Support

DATE: 6/10/2020

FILE: P.I.# 0013886
Baldwin County / GDOT District 2 - Tennille
SR29 BUS/US 441 BUS @ Fishing Creek in Milledgeville Bridge Replacement

FROM: *Dane Peters*
for R. Christopher Rudd, PE, State Design Policy Engineer

TO: SEE DISTRIBUTION

SUBJECT: APPROVED LOCATION & DESIGN REPORT

Attached is the approved Location and Design Report with Notice of Location & Design Approval for the above subject project.

Attachment


Distribution:

Hiral Patel, Director of Engineering
Joe Carpenter, Director of P3
Albert Shelby, Director of Program Delivery
Darryl VanMeter, Assistant Director of P3/State Innovative Delivery Administrator
Kim Nesbitt, Program Delivery Administrator
Bobby Hilliard, Program Control Administrator
Radney Simpson, Assistant State Transportation Planning Administrator
Eric Duff, State Environmental Administrator
Bill DuVall, State Bridge Engineer
Andrew Heath, State Traffic Engineer
Angela Robinson, Financial Management Administrator
Erik Rohde, State Project Review Engineer
Benny Walden, Statewide Location Bureau Chief
Corbett Reynolds, District Engineer
Todd Price, District Preconstruction Engineer
Ellen Wright, District Planning & Programming Coordinator
Danielle Hollinshead, Area Manager - D2, A1
Jeff Henry, Project Manager
BOARD MEMBER - 10th Congressional District



Location and Design Report

DATE: 3/13/2020

FILE: P.I.# 0013886
Baldwin County / GDOT District 2 - Tennille
SR 29 BU/US 441 BU @ Fishing Creek in Milledgeville  for

FROM: Kimberly W. Nesbitt, State Program Delivery Administrator

TO: Brent Story, P.E., State Design Policy Engineer
Attn: State Conceptual Design Group Manager

SUBJECT: Request for Location and Design Approval

Description and Project Proposal:

The proposed project will replace the existing S. Wayne St./SR 29 BU/US 441 BU bridge over Fishing Creek with a new bridge. The new bridge will be constructed on existing alignment while traffic is routed to an offsite detour. Backwater flooding from the Oconee River, which is approximately 4,500 feet downstream of the project, requires raising the bridge profile by approximately 8 feet to provide freeboard over the abnormal flood elevation. The total project length is about 2,150 feet.

Concept Approval Date: July 11, 2018

Concept Update: N/A

Environmental Document Type: NEPA - PCE

Approval Date: June 9, 2020

Public Involvement:

- Public Information/Detour Open House Results summary:
 - The Open House was held on August 7, 2018 at Milledgeville City Hall.
 - A total number of two comments were received.
 - Out of the two comments received, one was in support and the other was uncommitted regarding the project.
 - The total number of attendees was 17, and no significant changes were made based on the comments received.

Consistency with Approved Planning: The design description as presented herein and submitted for approval is consistent with the approved Concept Report.

Recommendations: Recommend that the location and design for the project be approved and that the attached Notice be approved for advertising.

County: Baldwin

Concur:



GDOT Director of Engineering

4-2-2020

Date

Approve:

For GDOT Chief Engineer

4-22-2020

Date

DATE OF LOCATION AND DESIGN APPROVAL:


June 10, 2020

(To be entered by State Conceptual Design
Group Manager)

Attachments:

- Location Map
- Notice of Location and Design Approval

SR 29 BU/US 441 BU @ Fishing Creek in Milledgeville – Bridge Replacement
P.I. Number: 0013886

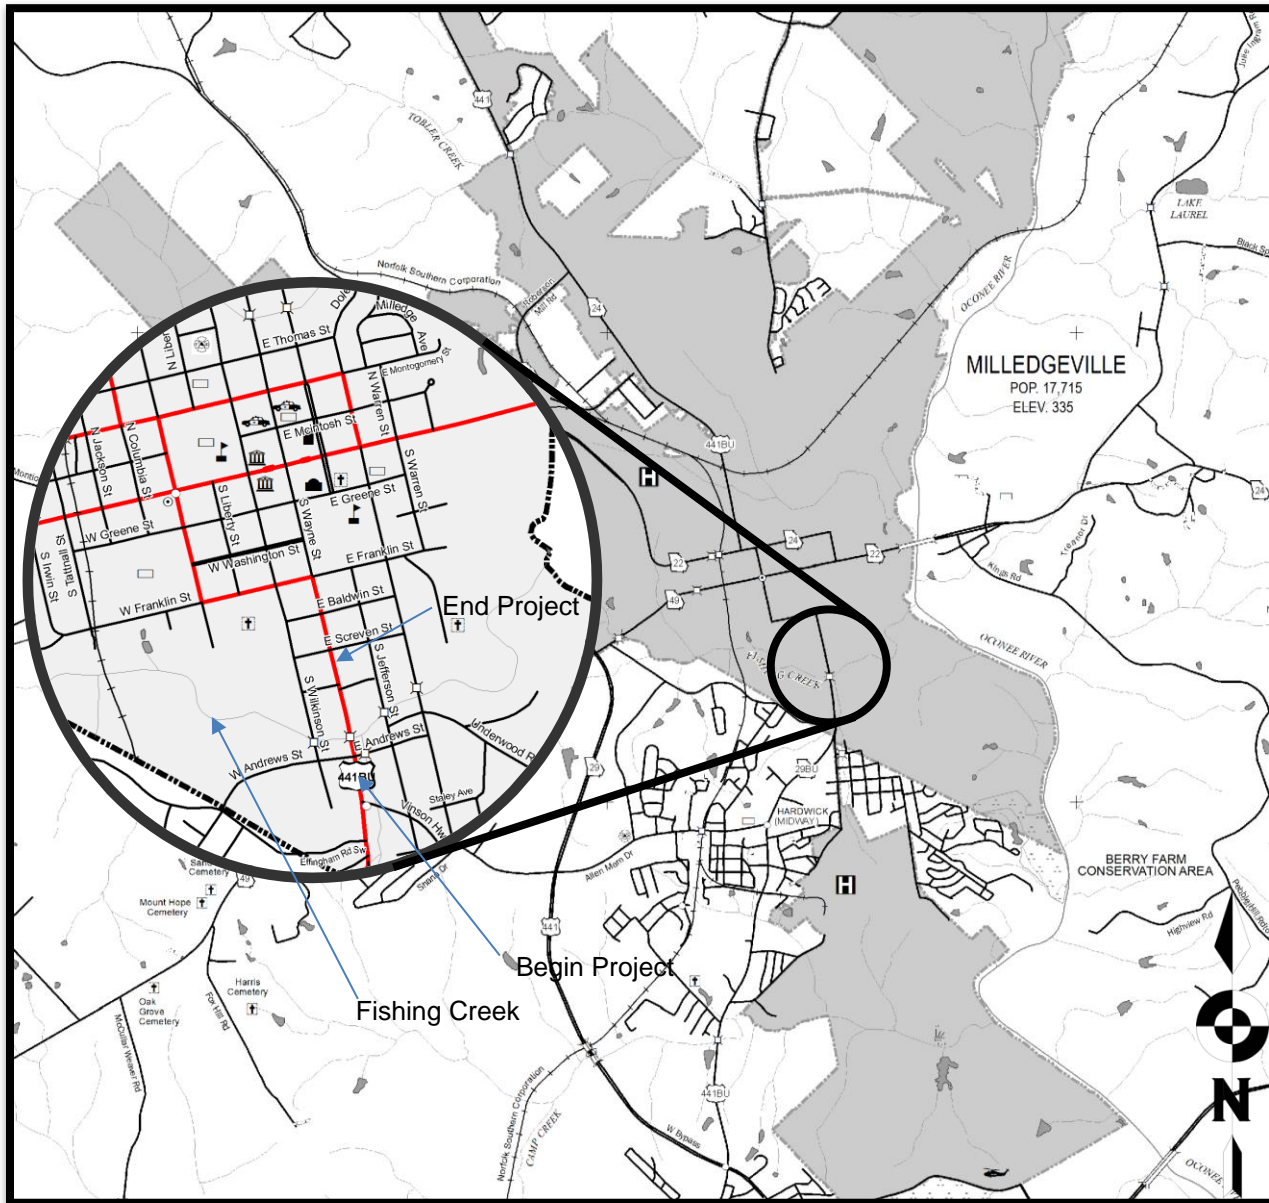

NOTICE OF LOCATION AND DESIGN APPROVAL

P. I. 0013886

BALDWIN COUNTY

Notice is hereby given in compliance with Georgia Code 22-2-109 and 32-3-5 that the Georgia Department of Transportation has approved the Location and Design of this project.

The date of location and design approval is: June 10, 2020

This project will replace the existing bridge on S. Wayne St./SR 29 BU/US 441 BU over Fishing Creek in Baldwin County. The project site is within the City of Milledgeville in Land Lots 286, 285, 291, and 292. The site is also located in the 320th Georgia Militia District (GMD).

The bridge will be closed during construction and traffic will be routed to an offsite detour. It is estimated that construction will last for about 18 months. The intersection of S. Wayne St. and Andrews St. will be closed for approximately 30 consecutive days of the construction period to raise the intersection in association with raising the bridge and for relocation of the traffic signal poles. Access to local business driveways will be maintained throughout construction.

NOTE: Ordinarily the maps or plats would be available for public review at our area office. Due to current COVID-19 measures, members of the public are not allowed to enter state buildings at this time. We apologize for the inconvenience. Anyone with questions or concerns about the project should call or email the area engineer listed below. To obtain copies of the drawings, maps or plats, please follow the instructions outlined below.

Danielle Hollinshead, Assistant Area Manager
District 2, Area 1
dhollinshead@dot.ga.gov
161 Blandy Rd
Milledgeville, GA 31061
478-445-5130

Any interested party may obtain a copy of the drawings or maps or plats or portions thereof by paying a nominal fee and requesting in writing to:

Kimberly W. Nesbitt, State Program Delivery Administrator
Office of Program Delivery
Attn: Jeff Henry, P.E.
jhenry@dot.ga.gov
600 West Peachtree St NW
Atlanta, GA 30308
404-663-8649

Any written request or communication in reference to this project or notice SHOULD include the Project and P. I. Numbers as noted at the top of this notice.